



MCT225 Metrology CT

For a widest range of samples and materials



MCT225

Absolute accuracy for inside metrology

MCT225 provides Metrology CT for a wide range of sample sizes and material densities in accordance with the latest industry standards. All internal and external geometry is measured efficiently without reference measurements or damaging the sample. With fifty years' CMM experience and twenty five years' X-ray experience, our pedigree for reliable high quality Metrology CT is second to none.

FLEXIBLE EFFICIENCY

Widest range of sample sizes and material densities

MCT225 is an invaluable asset for manufacturers seeking to benefit from reduced leads times and inspection cycles. The powerful X-ray source and large capacity manipulator combine with high magnification and small feature detection to create a solution suited to a wide variety of applications. All internal and external geometry of complex parts and assemblies can be measured and analyzed in a single non-destructive process.


Mold tool development

Plastic injection-mold and metal die-cast toolmakers can reduce correction cycles during tool development by 50%. All shrinkage, deformation and dimensional errors are clearly identified with easy to understand inspection reports. Optimization of mold parameters can be shortened from weeks to days, accelerating the time to market for new products and designs.


Metrology CT process




F1 car
hydraulic manifold




CT volume
reconstruction



Direct comparison
to CAD model



Section of
internal geometry



Dimensional report
GD&T

Accuracy 9+L/50µm

Pre-calibrated and certified
accuracy according
to VDI/VDE 2630

Dual monitors

Full screen image
and software controls




Nikon Metrology X-ray source

Variable voltage 225kV
micro-focus reflection source


MATERIAL PENETRATION GUIDE

PLASTIC	170mm (6.7")
ALUMINIUM	75mm (2.9")
IRON	15mm (0.6")

Other suitable materials include:
STEEL, CERAMIC, CARBON FIBRE, WOOD

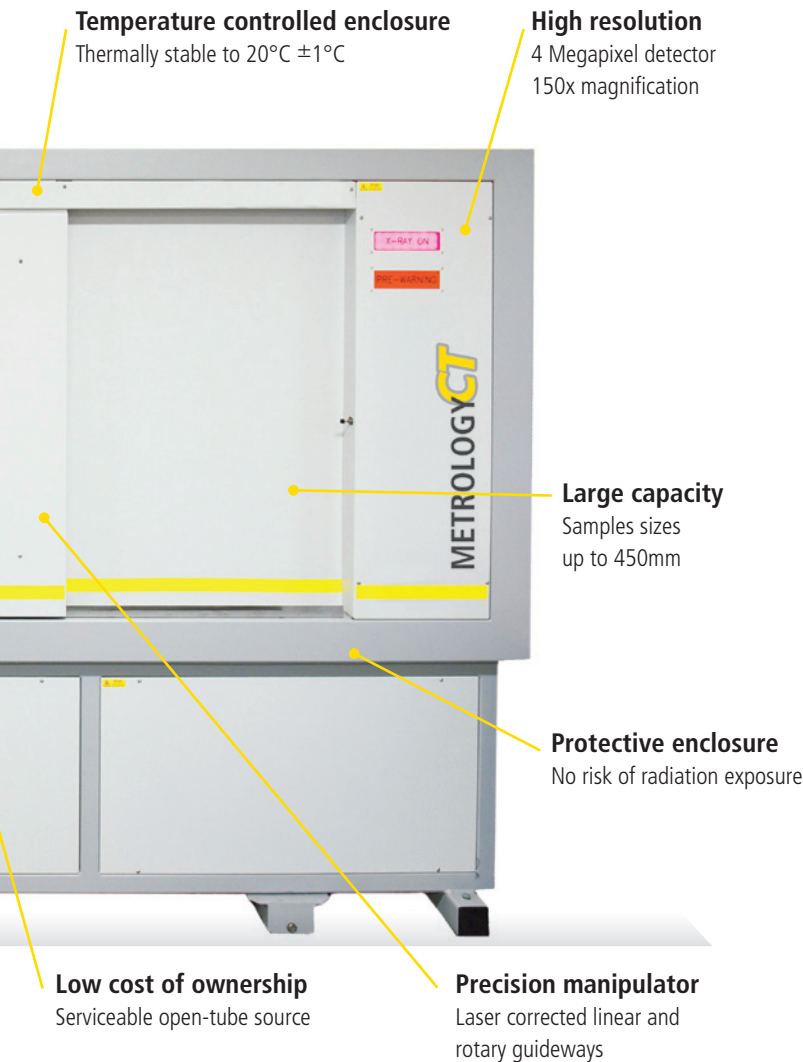

CT scan of plastic fan



Section showing CAD comparison

COMPLETE SOLUTION

Everything to hand

The unique CT Wizard guides the operator every step of the way from sample loading to creating the final inspection report. Settings are automatically optimized for accuracy and image quality without compromising on productivity. Accelerated reconstruction of the sample volume, using optimized graphics cards, reduces the total process time from hours to minutes.

Reporting and analysis features include:


- Part-to-CAD comparison with colour mapping
- Surface measurement using surface and voxel data
- Geometric feature inspection
- Geometric Dimensioning and Tolerancing (GD&T)
- 3D visualization of the sample volume

The same dataset can easily be used for measurement and defect analysis (NDT).

ABSOLUTE ACCURACY

MCT225 is pre-calibrated using accuracy standards traceable to the UK's national measurement institute (NPL) and verified using VDI/VDE 2630 guidelines for Computed Tomography in Dimensional Measurement. Absolute Accuracy guarantees measurement accuracy without time consuming comparative scans or reference measurements, samples are simply placed on a rotary table inside the enclosure and measured. Several key metrology features provide long term stability and enable the MCT225 to achieve an impressive accuracy specification of 9+L/50µm.

- Nikon Metrology developed micro-focus X-ray source.
- Temperature controlled enclosure.
- High precision linear guideways.
- Axis travels error corrected.
- Liquid cooled X-ray source.
- High resolution optical encoders.
- High resolution 4Megapixel detector.
- Finite Element Analysis (FEA) optimized manipulator.

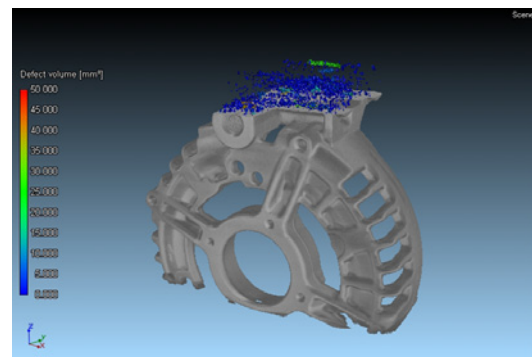

NDT void detection of aluminium casing


SPECIFICATIONS

Accuracy(μm) ¹ (VDI/VDE 2630)	9+L/50 (L in mm)
Sample size (maximum)	Diameter 250mm (9.84") Height 450mm (17.71")
Sample weight (maximum)	5kg (11lbs)
Manipulator travel	X 480mm (18.89") Y 450mm (17.71") Z 730mm (28.74") R 360deg
Source to detector	1165mm (nominal) (45.98")
Detector	16 bit 4Mpixels (2000x2000 pixel)
Magnification	1.6x to 150x
Feature detectability (minimum)	2D radiography 2 μm (0.002")
X-ray source	225kV/225W open tube
X-ray spot	3 μm (0.00012in) micro-focus
Enclosure temperature	19 to 21°C (66 to 70°F)
Ambient temperature	17 to 25°C (63 to 77°F)
Radiation protection (DIN 54113-2, IRR99)	< 1 $\mu\text{Sv/hr}$
Enclosure dimensions	W2214mm (87.2") x D1275mm (50.2") x H2205mm (86.8")
System weight	4200Kg (9260 lbs)

¹ Applies only to single material samples with a maximum diameter of 250mm (9.84") and maximum height of 250mm (9.84")

MCT225

Absolute accuracy for inside geometry

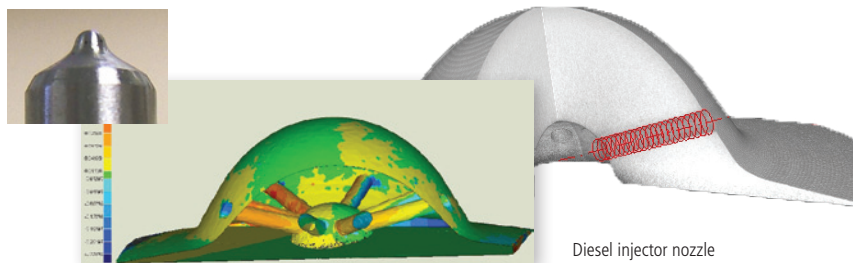

Diesel injector nozzle



NIKON METROLOGY NV

Geldenaaksebaan 329
B-3001 Leuven, Belgium
phone: +32 16 74 01 00 fax: +32 16 74 01 03
info@nikonmetrology.com

NIKON METROLOGY EUROPE NV
tel. +32 16 74 01 01
sales_europe@nikonmetrology.com

NIKON METROLOGY GMBH
tel. +49 6023 91733-0
sales_germany@nikonmetrology.com

NIKON METROLOGY SARL
tel. +33 1 60 86 09 76
sales_france@nikonmetrology.com

NIKON METROLOGY, INC.
tel. +1 810 2204360
sales_us@nikonmetrology.com
us.nikonmetrology.com
www.nikoninstruments.com

NIKON METROLOGY UK LTD.
tel. +44 1332 811349
sales_uk@nikonmetrology.com

NIKON CORPORATION

Shin-Yurakucho Bldg., 12-1, Yurakucho 1-chome
Chiyoda-ku, Tokyo 100-8331 Japan
phone: +81 3 3773 9026 fax: +81 3 3773 9062
www.nikon-instruments.jp/eng/

NIKON INSTRUMENTS (SHANGHAI) CO. LTD.
tel. +86 21 5836 0050
tel. +86 10 5869 2255 (Beijing office)
tel. +86 20 3882 0550 (Guangzhou office)

NIKON SINGAPORE PTE. LTD.
tel. +65 6559 3618

NIKON MALAYSIA SDN. BHD.
tel. +60 3 7809 3609

NIKON INSTRUMENTS KOREA CO. LTD.
tel. +82 2 2186 8400

More offices and resellers at www.nikonmetrology.com